


# FF/060/PD/BF/BL

## SUITABLE FOR WALLS & CEILINGS

# FLIPFIX™

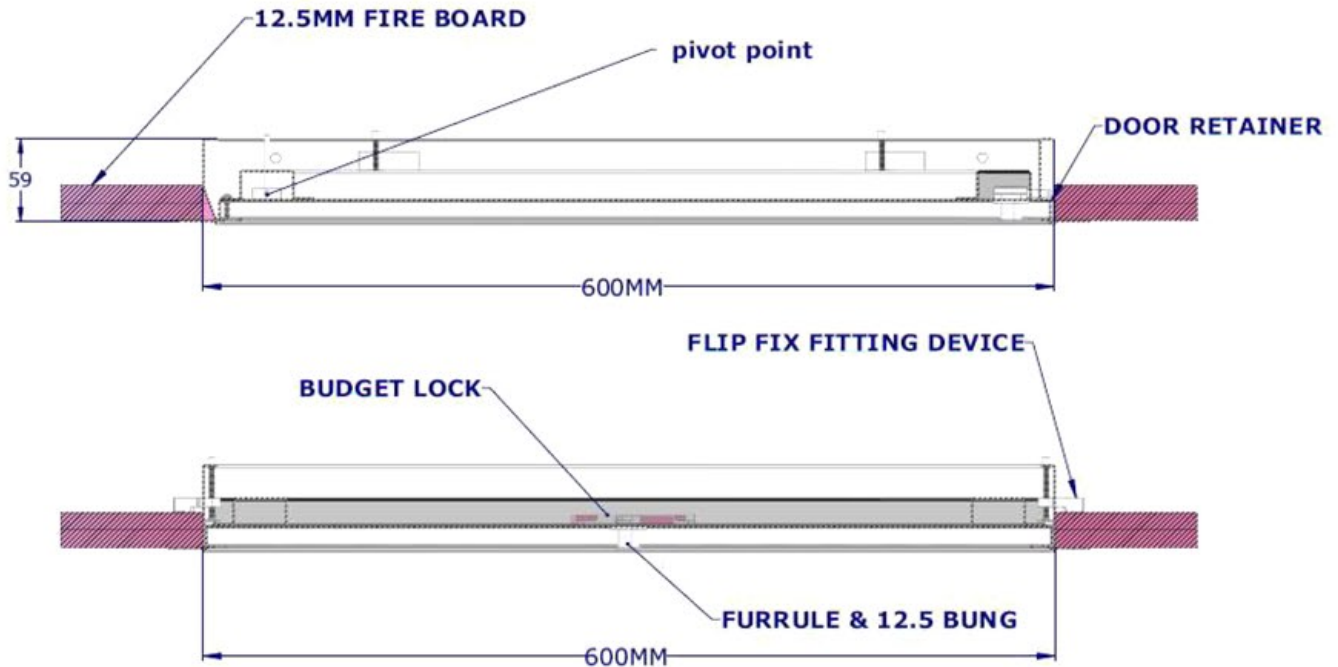

### Description

This panel is designed to fit into the structural membrane of a joint-less plasterboard ceiling/wall system. It is manufactured with a beaded frame and a flush beaded face plasterboard door with a standard budget lock. The unique fitting device called FlipFix allows installation without any additional wood, screws or glue. This panel is 1 Hour fire rated in accordance with B.S. 476: Part 22:1987. We advise tape and jointing prior to a wet finish being applied.

### Construction

The FF/060/PD/BF/BL is manufactured from Zintec steel, has a fully demountable plasterboard door and 56mm deep frame with fixing holes. The door is fitted with a screw pin hinge and is lockable with a standard budget lock. This panel is powder coated with RAL 9010 30% gloss.

### Stock Sizes:

300 x 300, 450 x 450, 600 x 600 (mm)  
Bespoke sizes available upon request.

### Fitting

To fit the panel, cut the plasterboard to the structural opening required. Allow 5mm Hinge side and 5mm width EG 600H x 600W will be 605H x 605W. Stock sizes are supplied with a pop out template built into the box for marking your structural opening. You don't need to remove the door, just open the panel using the budget key supplied, place the frame into the aperture. Using a cordless drill, tighten the FlipFix device via the fixing screw behind the door leaf to clamp on to the back of the plasterboard (the FlipFix fitting device covers 32mm to 8mm plasterboard). it takes seconds to fit.

# THE REVOLUTION HAS STARTED

## WORLDWIDE PATENTS PENDING